

FIG. 1

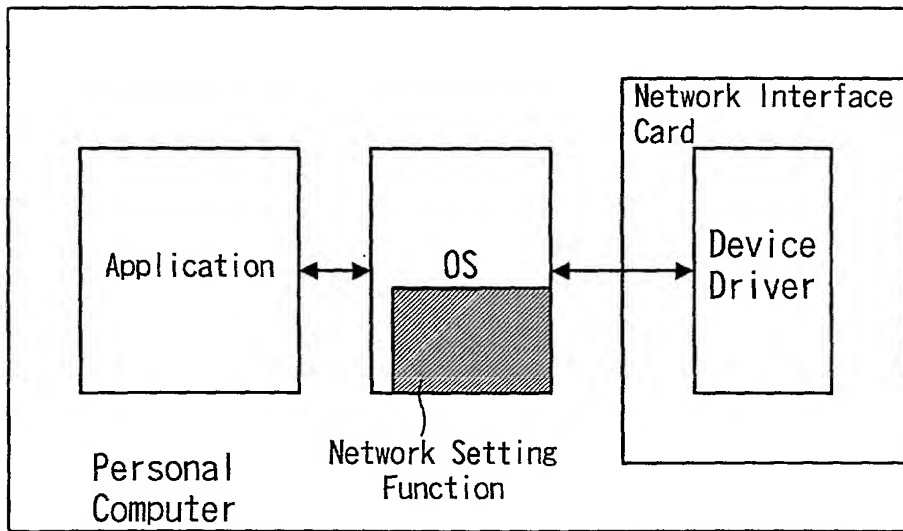


FIG. 2

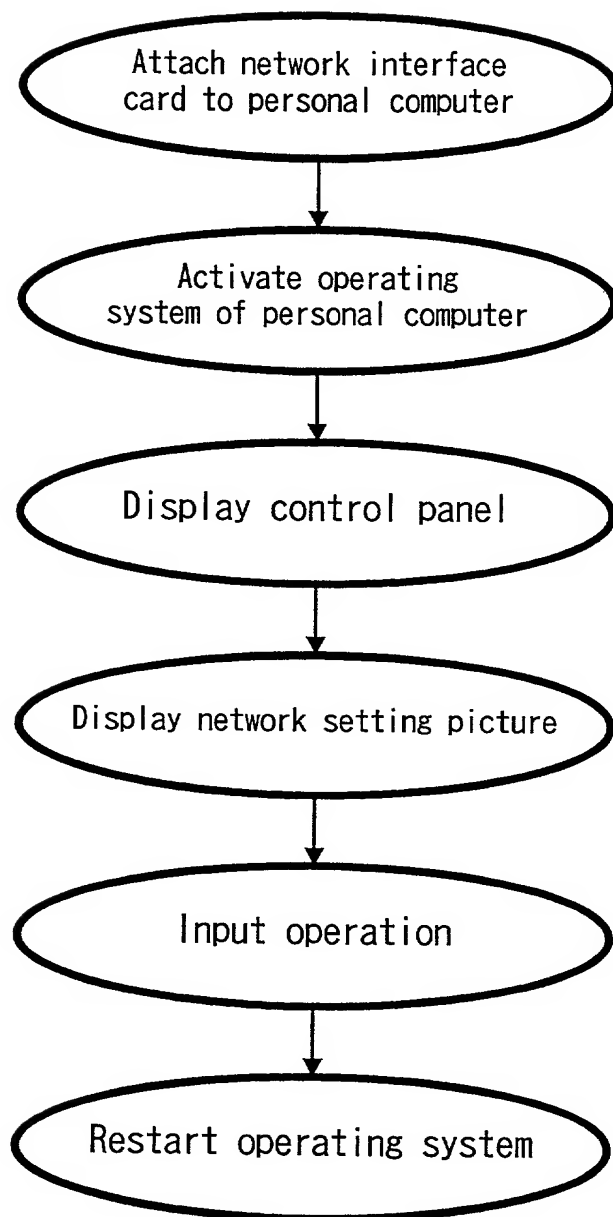


FIG. 3

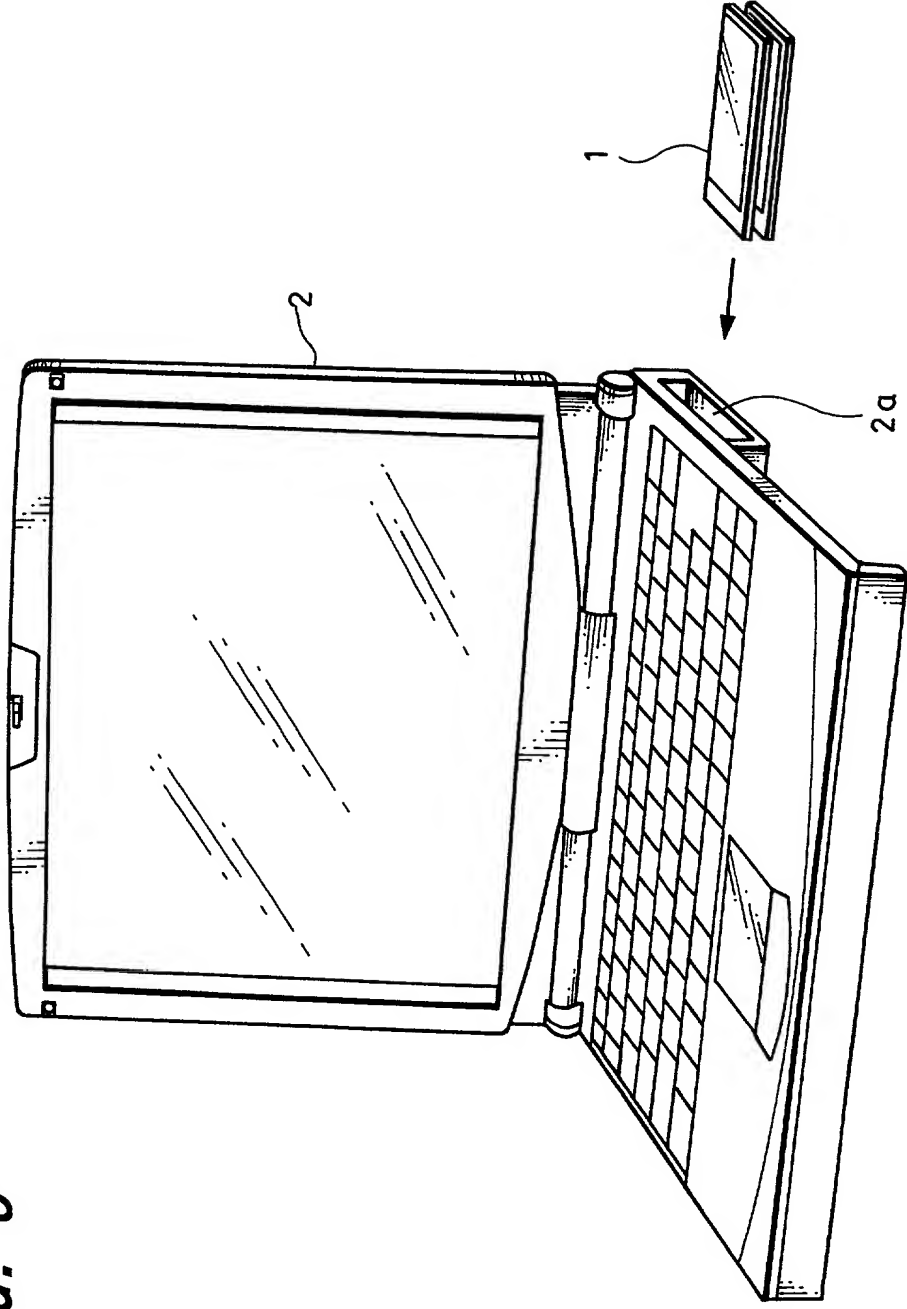


FIG. 4

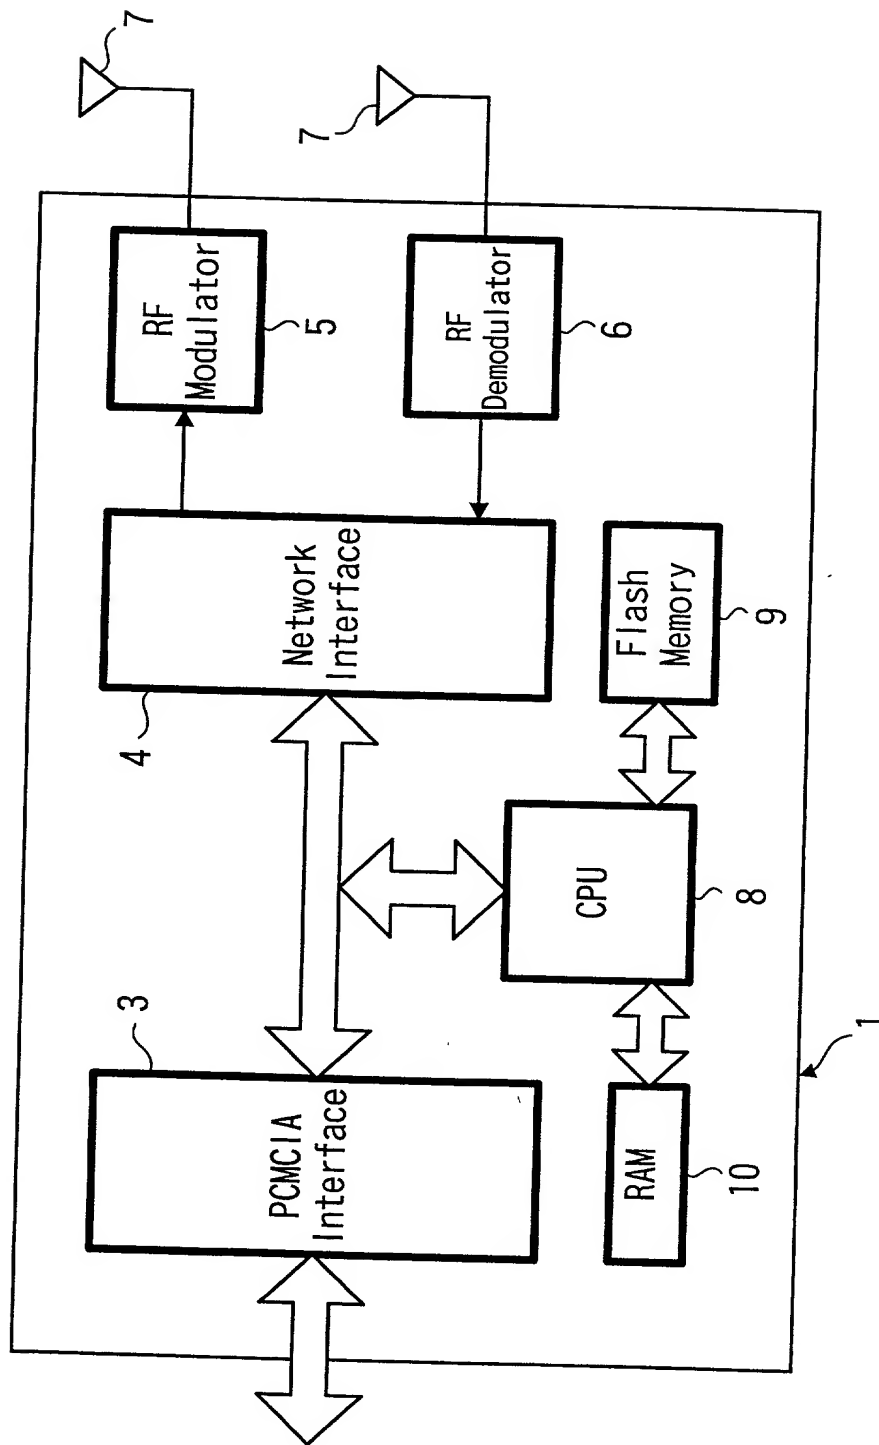


FIG. 5

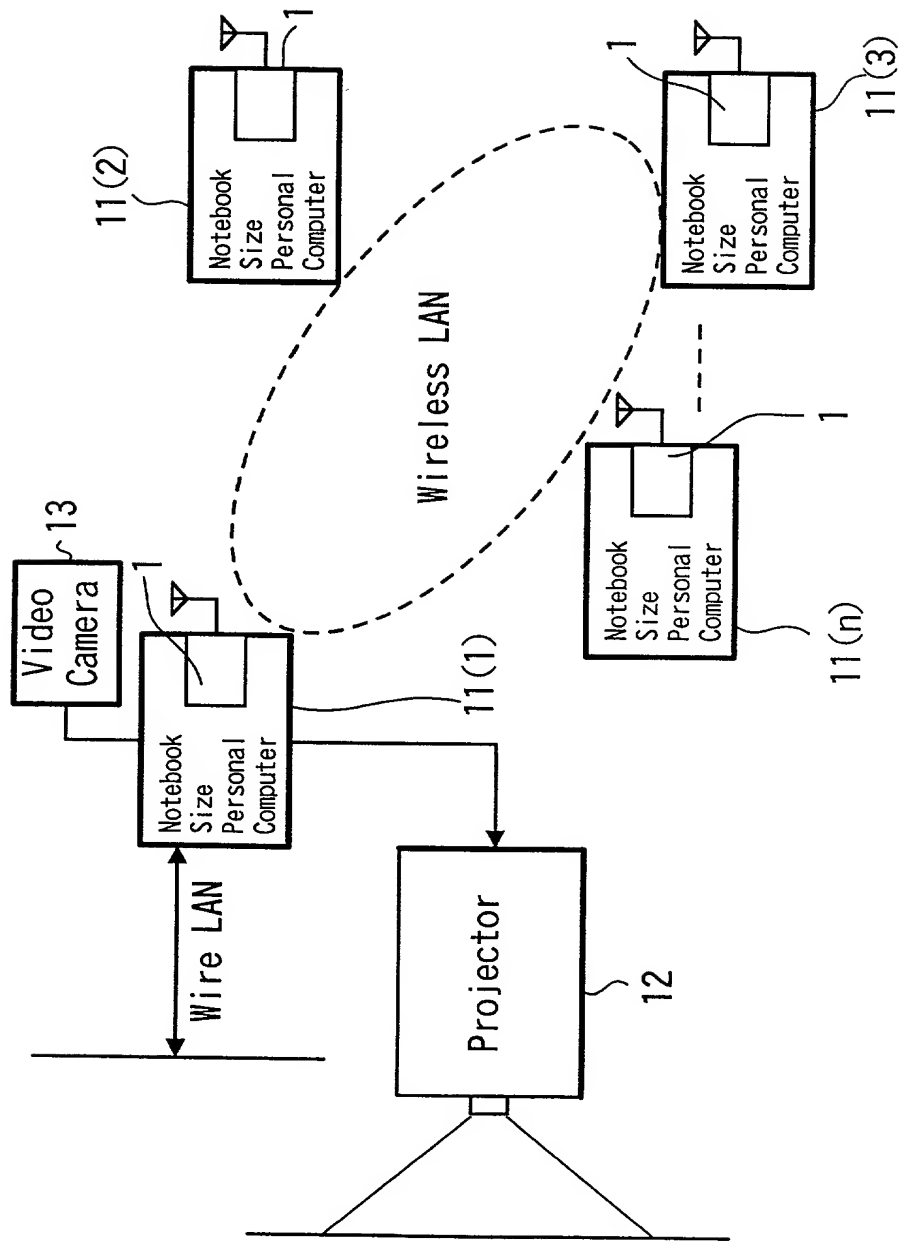


FIG. 6

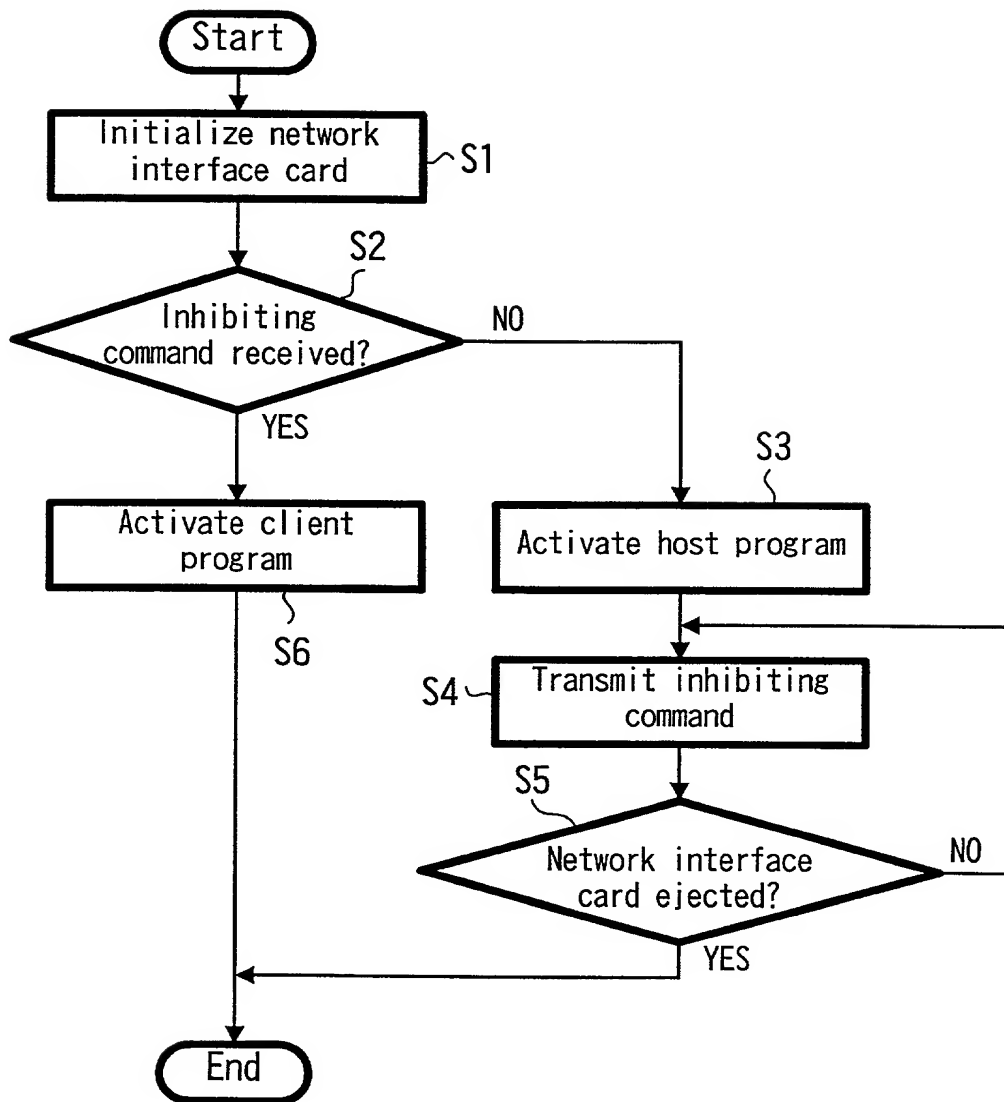


FIG. 7

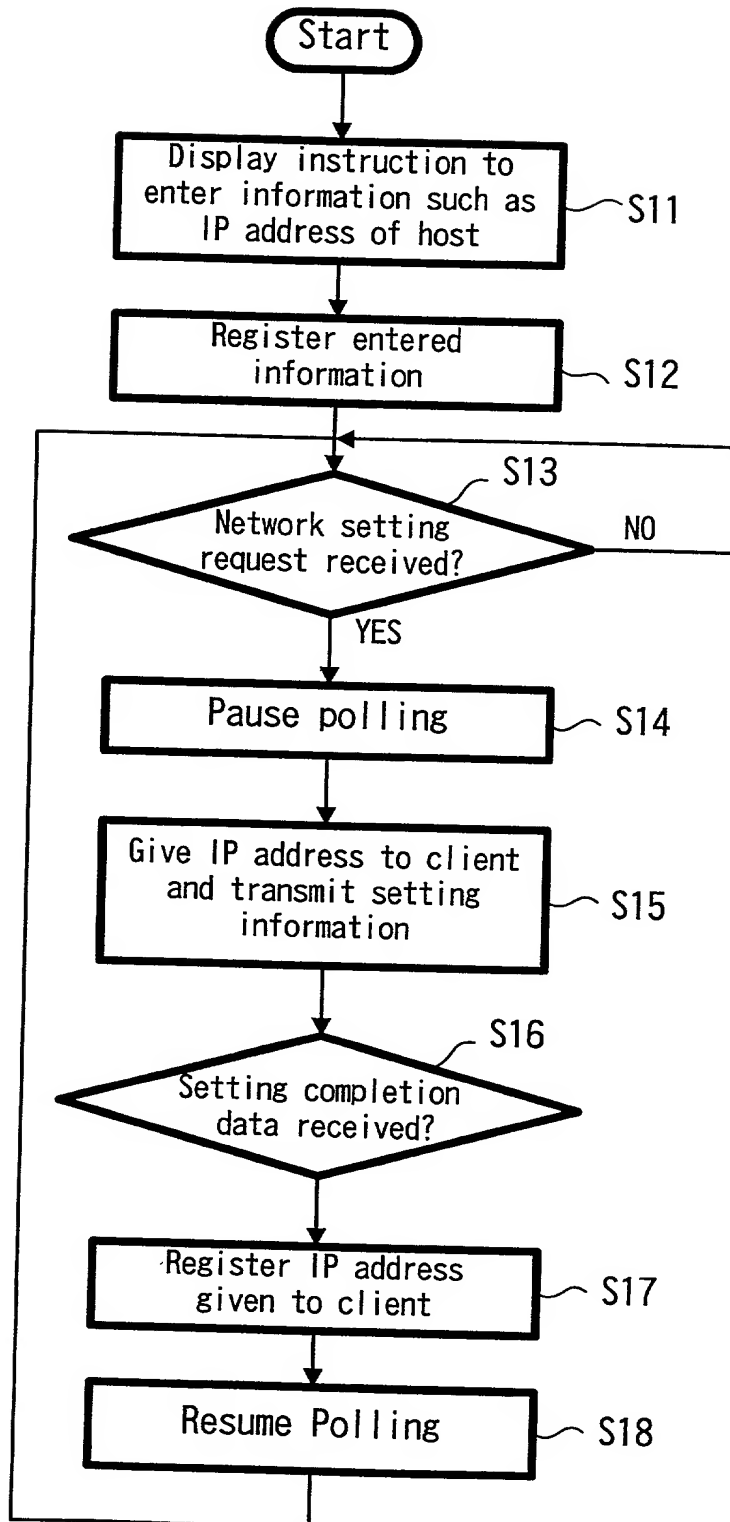


FIG. 8

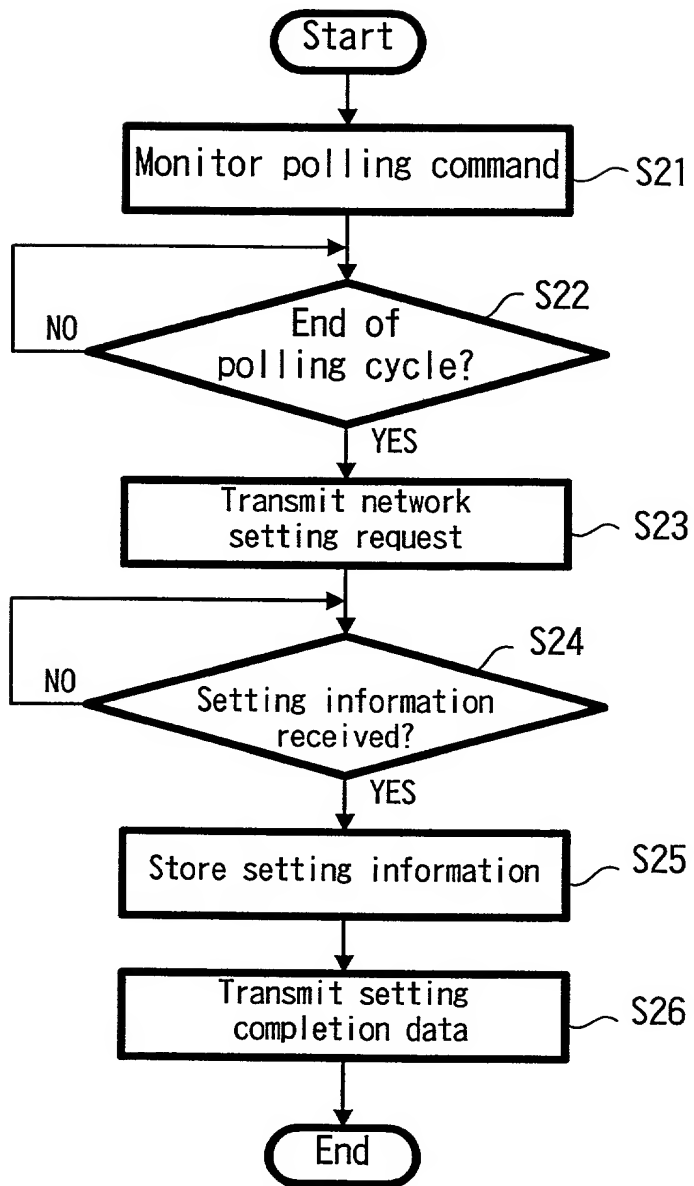


FIG. 10A

Address of Transmission Destination	Address of Transmission Source	Following Bytes	Data or Command	Checksum
---	--------------------------------------	--------------------	-----------------	----------

FIG. 10B

Poling end
Request IP Address
Complete set IP Address

FIG. 11

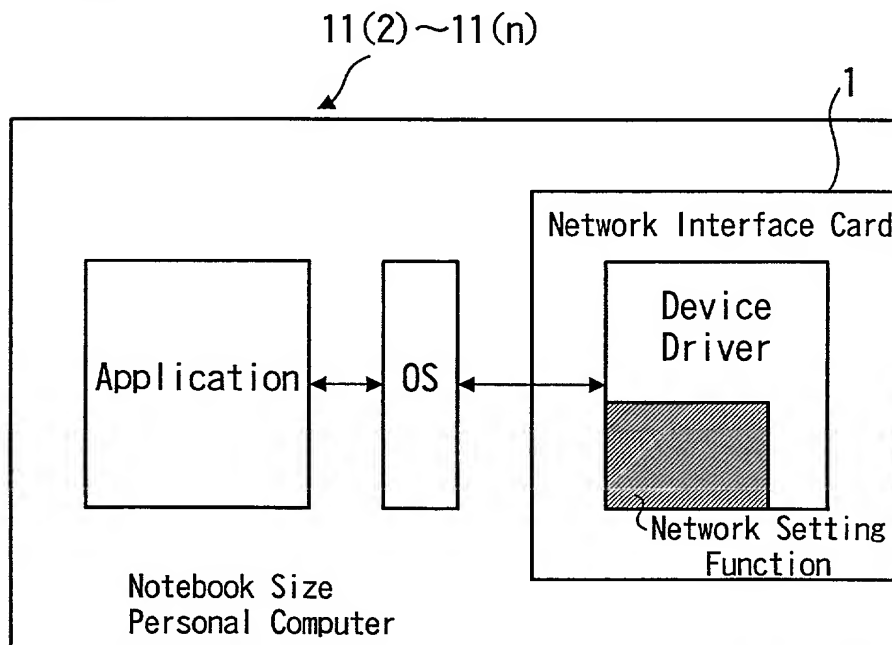


FIG. 12

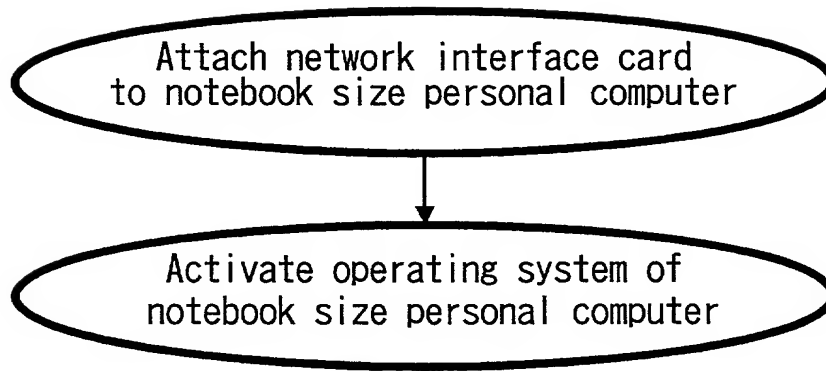


FIG. 13

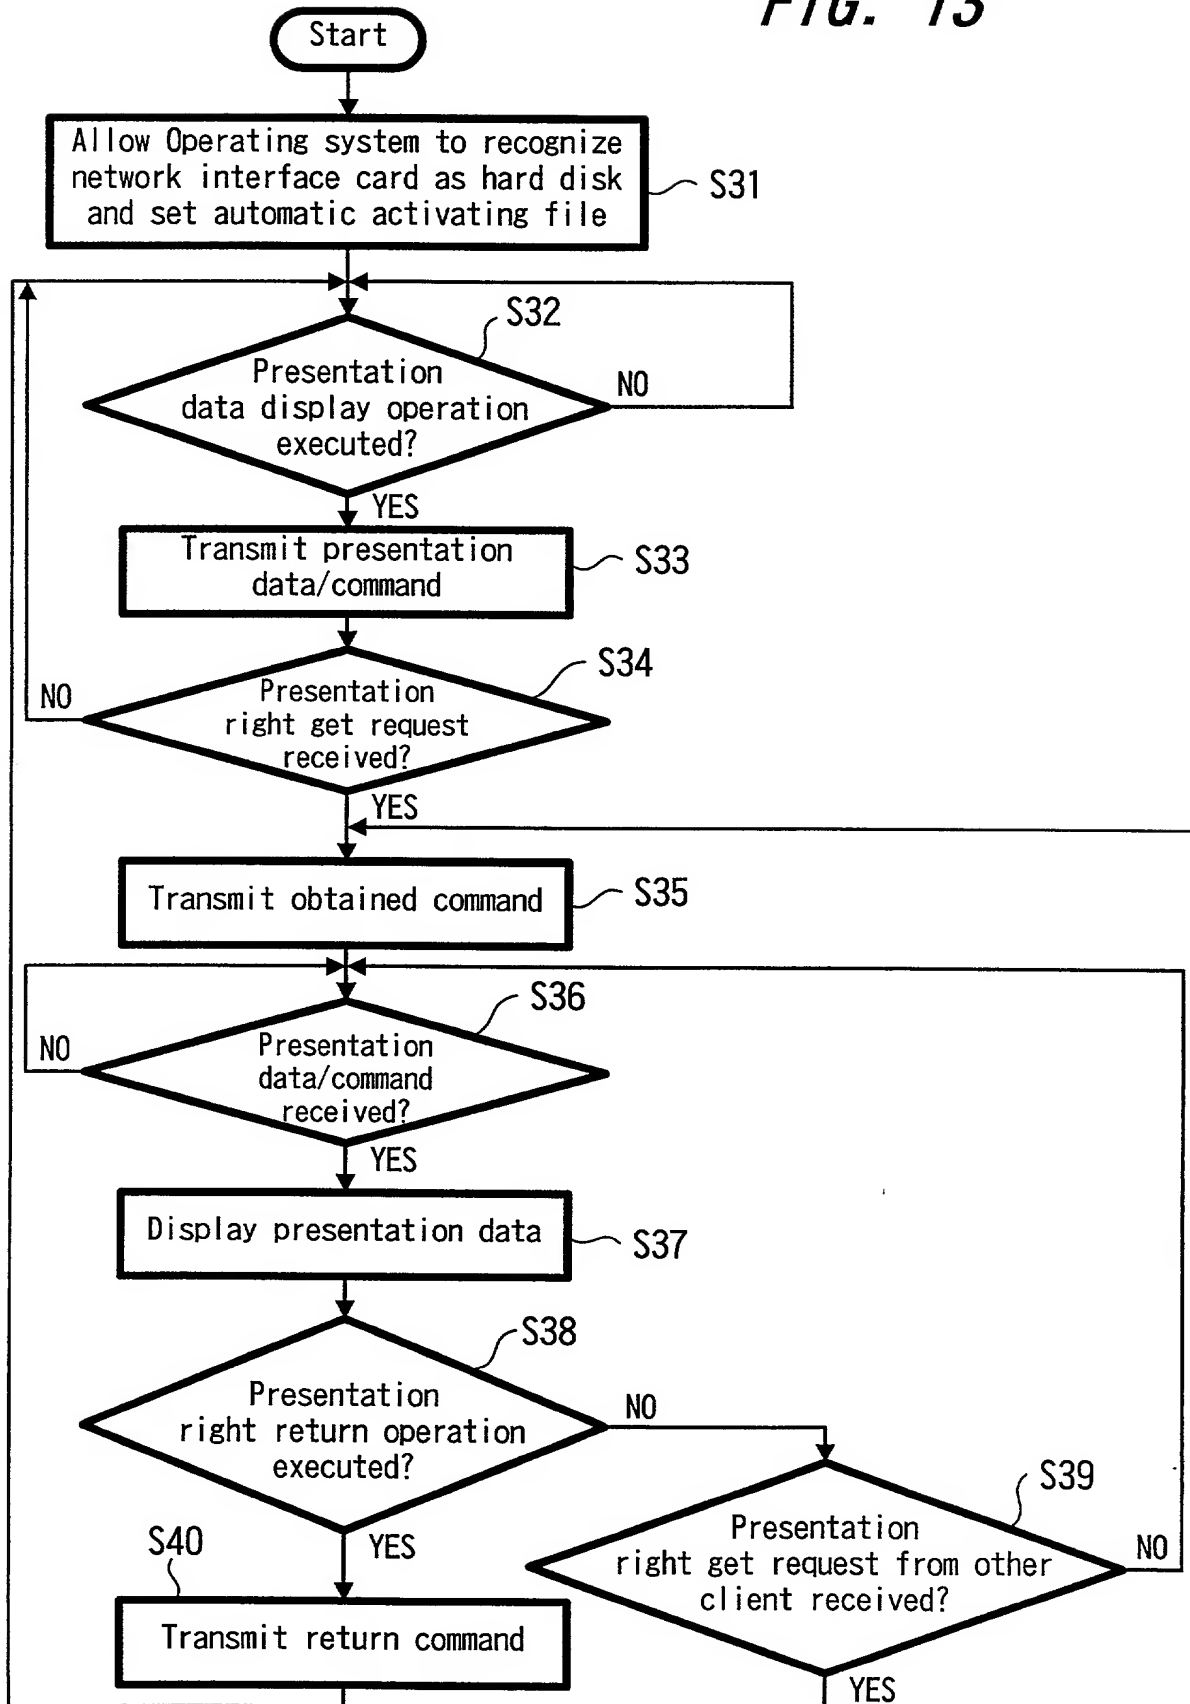


FIG. 14

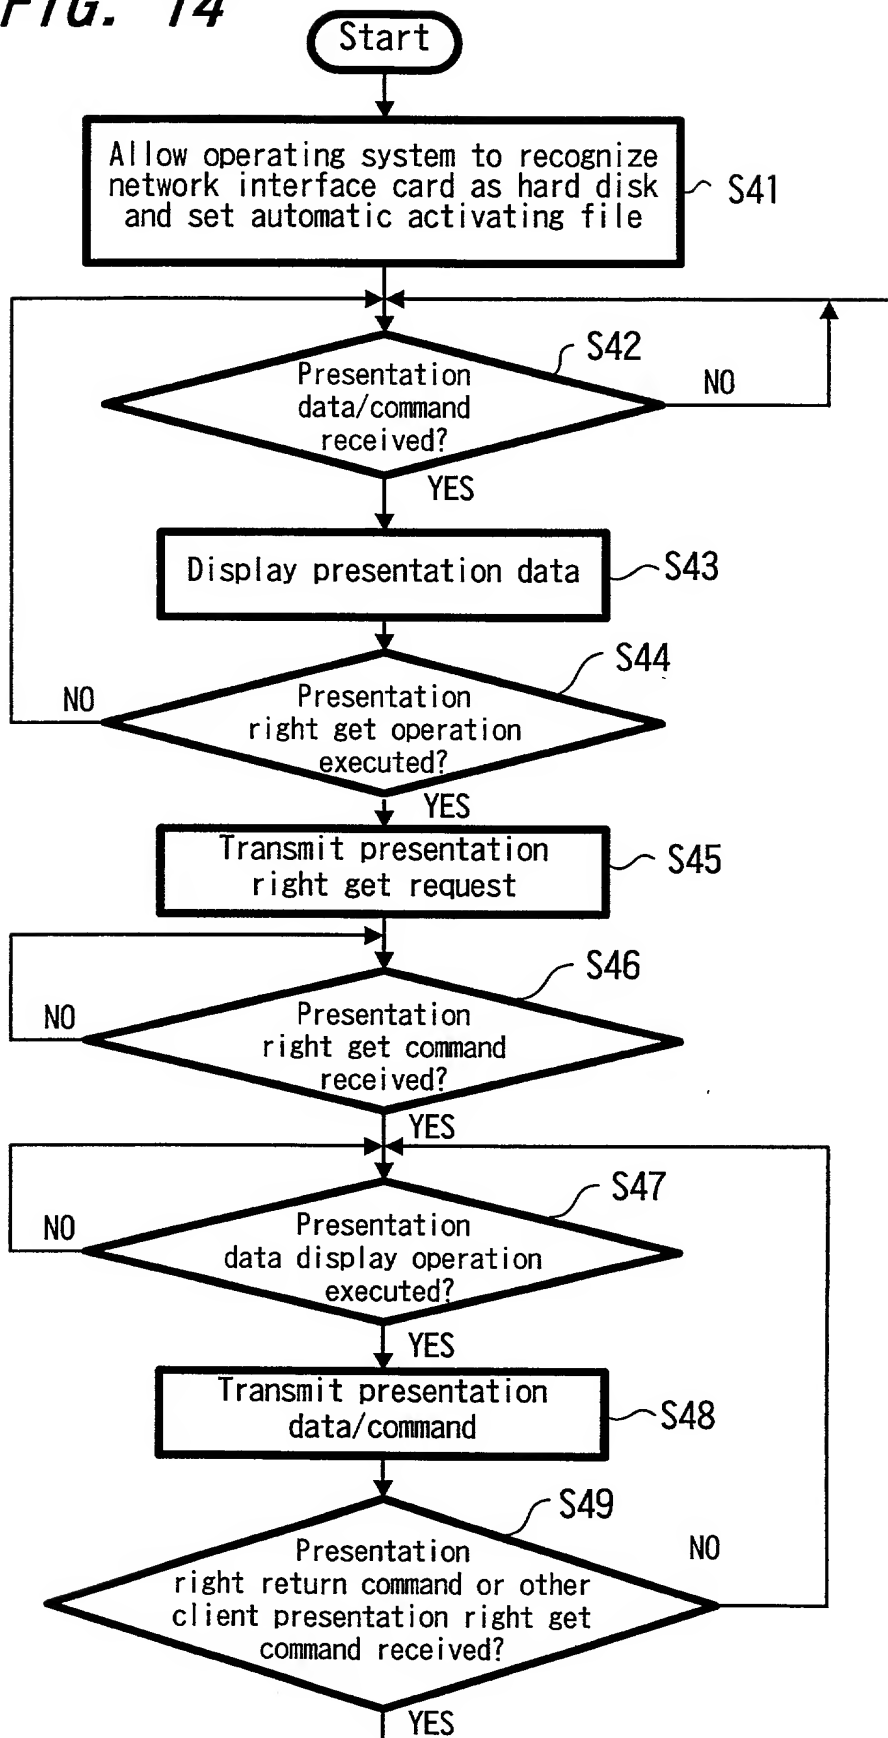


FIG. 15

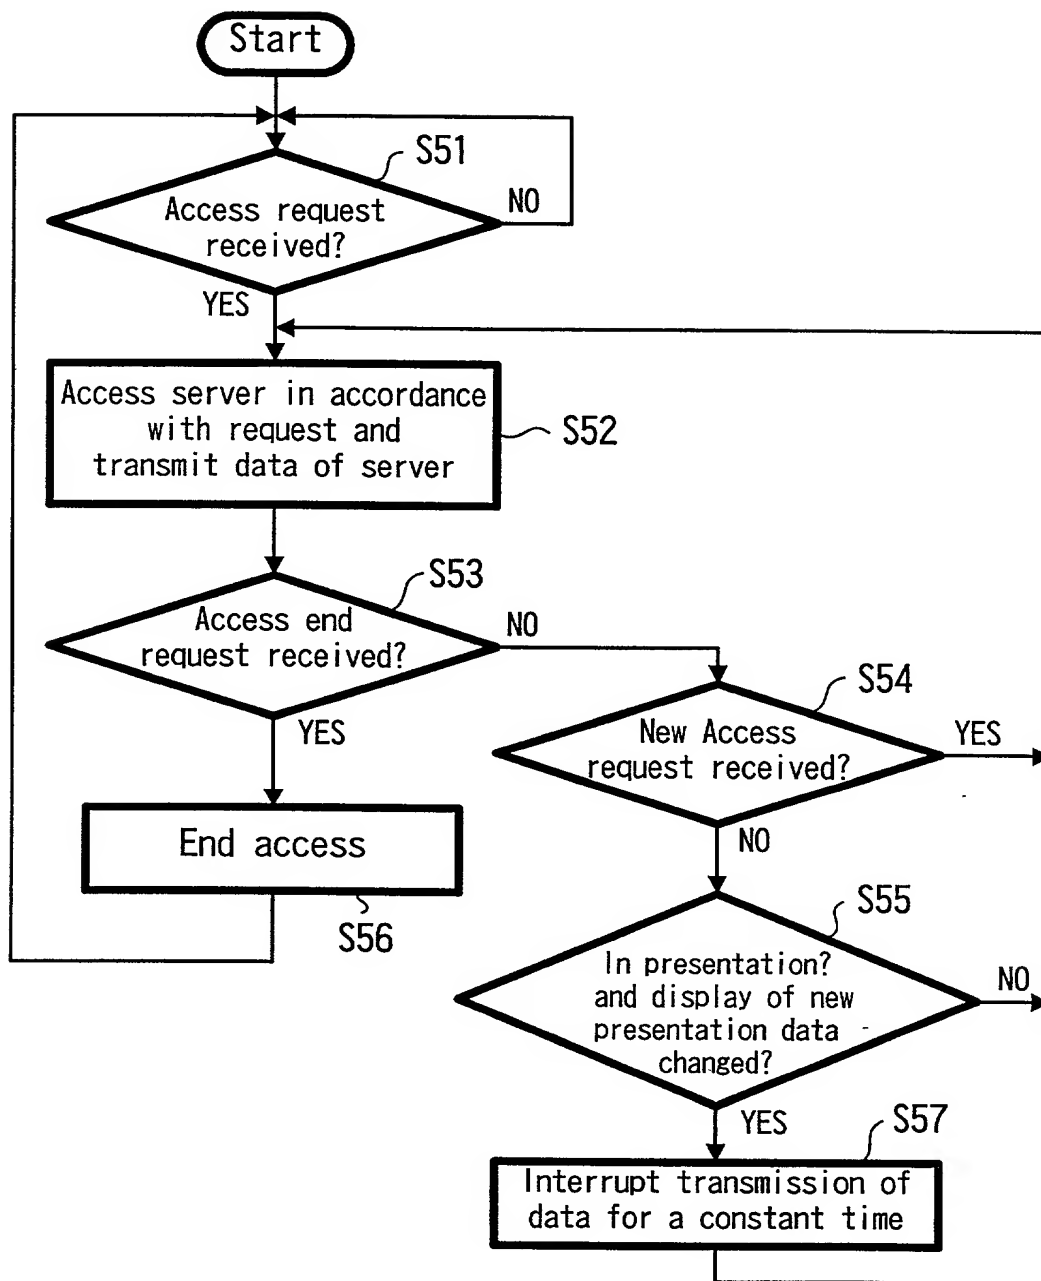


FIG. 16

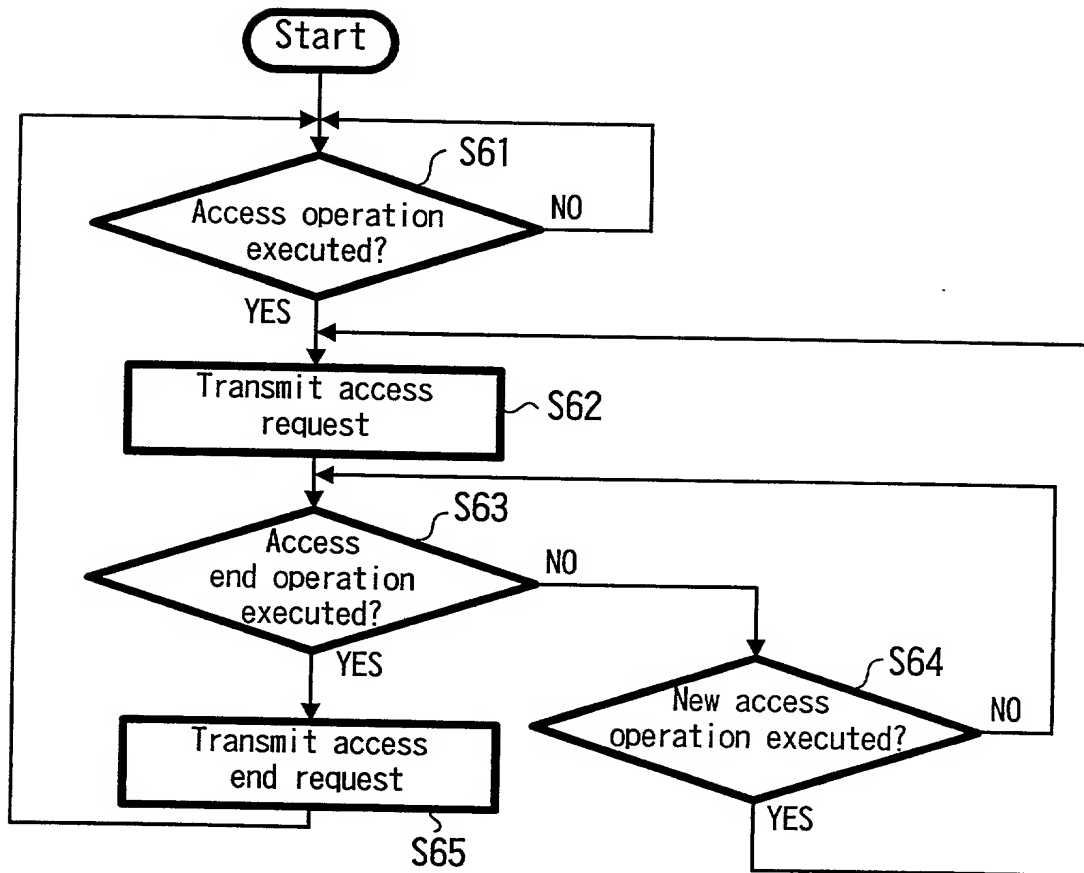


FIG. 17

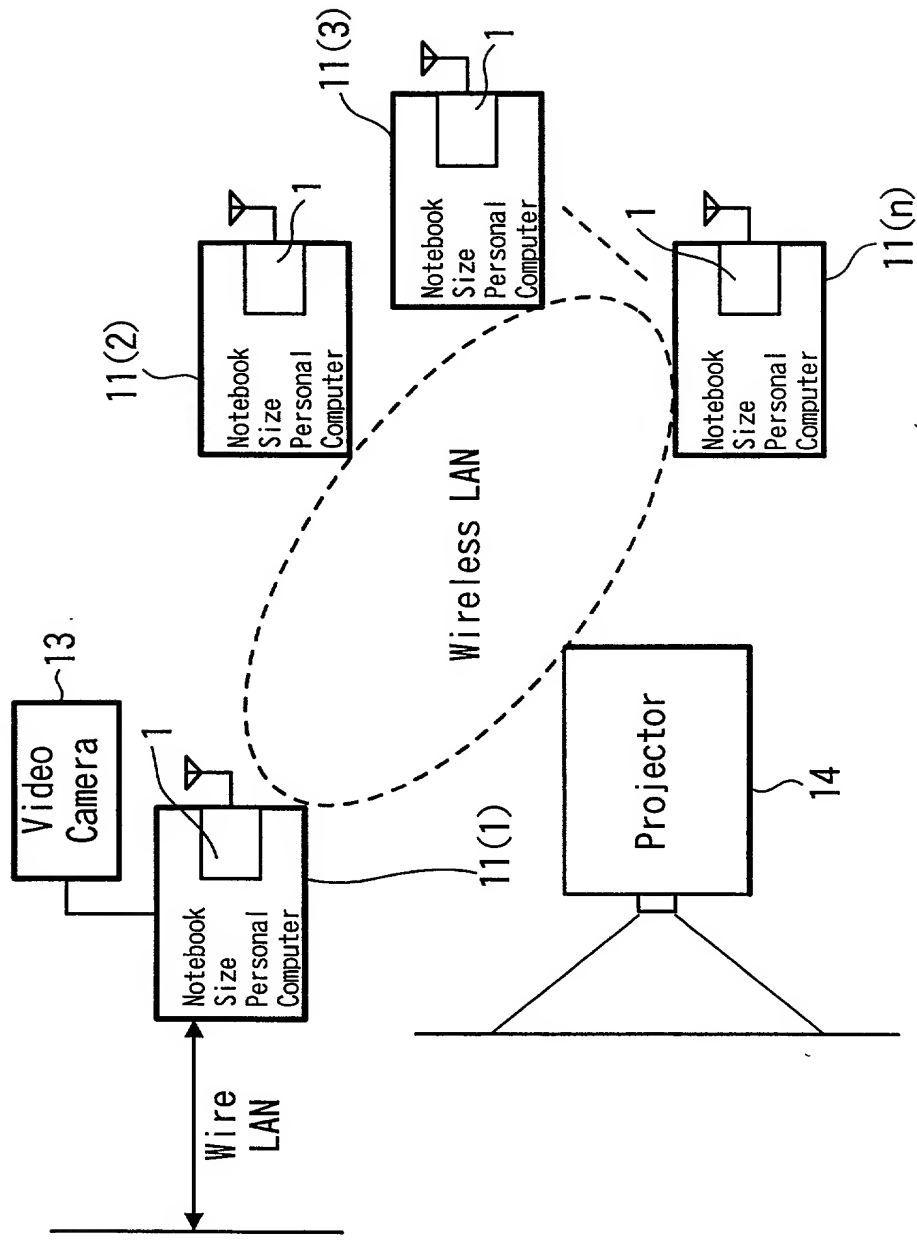


FIG. 18


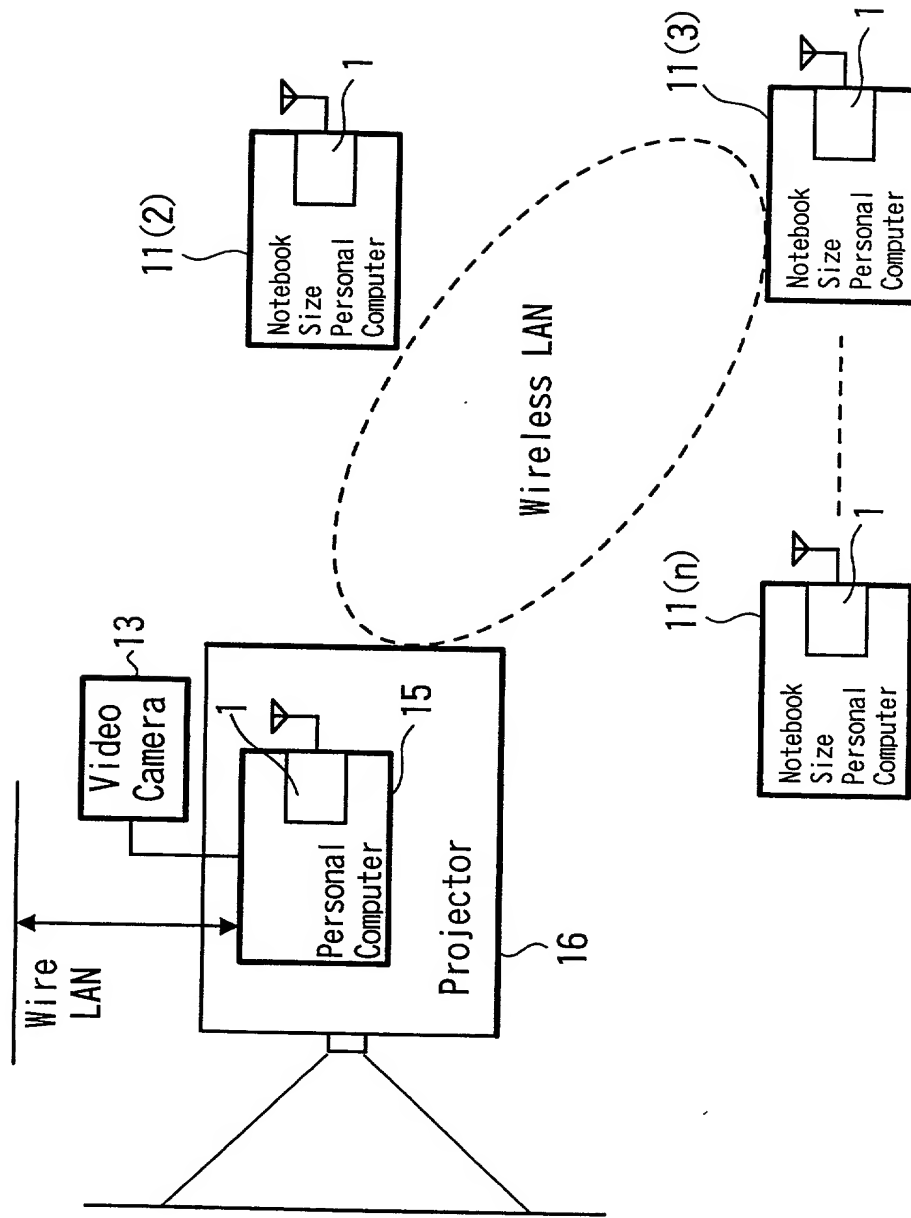


FIG. 19

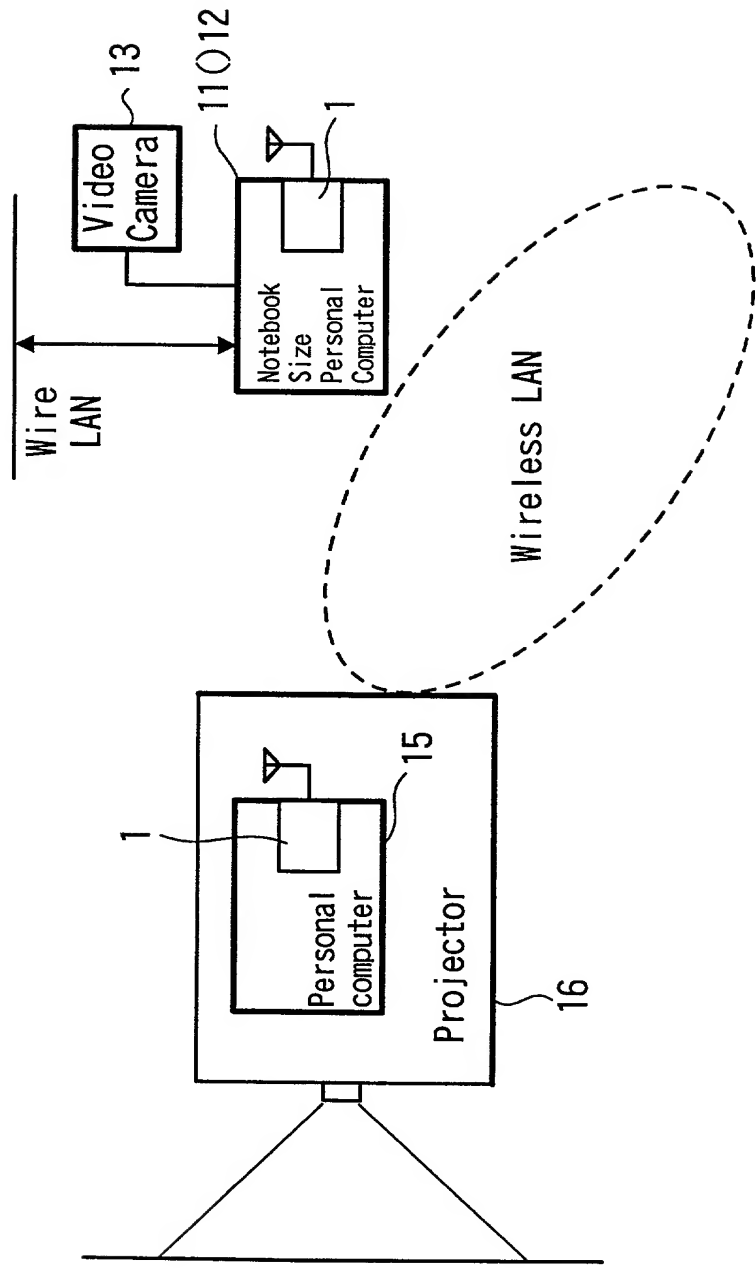

DESCRIPTION OF REFERENCE NUMERALS

- 1 ... network interface card
- 2 ... notebook size personal computer
- 2a ... PC card slot
- 3 ... PCMCIA interface
- 4 ... network interface
- 5 ... RF modulator
- 6 ... RF demodulator
- 7 ... antenna
- 8 ... CPU
- 9 ... flash ROM
- 10 ... RAM
- 11 (1) ... wireless LAN conference terminal device (host)
- 11 (2) to 11 (n) ... wireless LAN conference terminal devices
(clients)
- 12, 14, 16 ... projectors
- 13 ... video camera
- 15 ... personal computer